


Rev.	Revision Record	制作	日期
A0	首次发行	Y	2019-04-08


FRONT

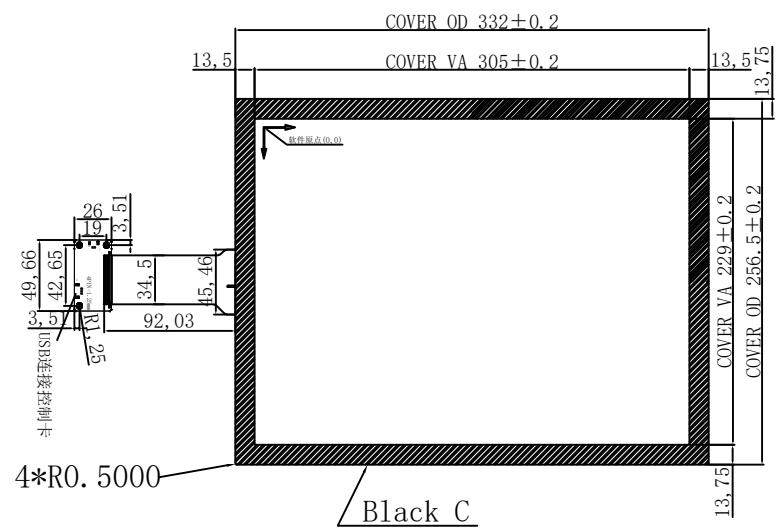

SIDE

T=2.7
COVER T=1.8
SCA T=0.2
SENSOR T=0.7

BACK

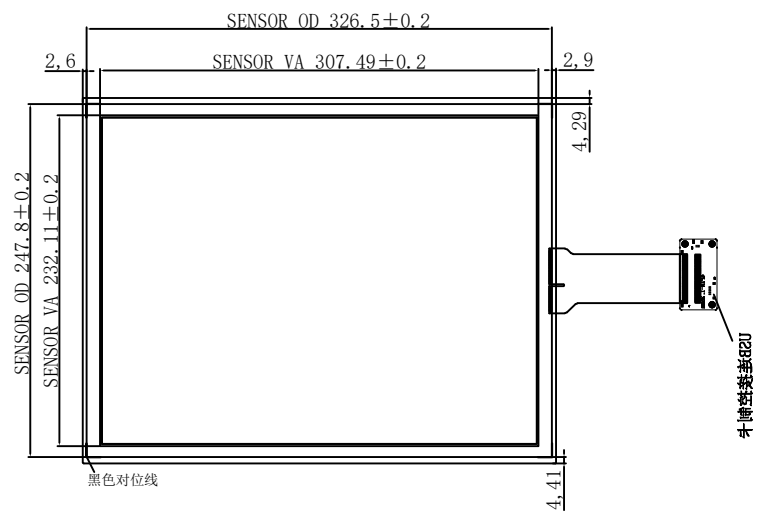

- Technical Parameter**
- TP Structure: G+G;
 - TP type: COB; IC: EXC80W46
EXC80W462341STAG Working Voltage: 5V
 - Transmittance: $\geq 85\%$
 - Surface Hardness: 6H or higher
 - Working Environment: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 85\% \text{RH}$
 - Storage Environment: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 85\% \text{RH}$
 - Unmarked dimensional tolerance: $\pm 0.3 \text{mm}$
 - Products comply with RoHS standards.

J1 (USB)	
PIN	Define
1	VDD/5V
2	D-
3	D+
4	GND

J2 (I2C)	
PIN	Define
1	VDD3.3
2	SDA
3	SCL
4	INT
5	RST
6	GND

OBEY CO., LIMITED				
TITLE: 产品编号	OB150P001-2M-H			
Designed By: 设计	Y	Customerid: 客户编号		View: 投影方式
Checked By: 审核		Unit: 单位	mm	
Approved By:		Date: 日期	2019.04.08	Scale: 比例
				1:1